Random Light II

BERTJAN POT



Random Light II by Bertjan Pot transmits a feeling of simplicity, lightness and a touch of magic in a contemporary style. Due to how they're made, each Random Light is unique. They're never completely round, yet always beautifully transparent and delicate. Random Light II is a suspension lamp: a sphere of fibreglass with epoxy resin on a chromed steel pendant.

Detailing




The open and random texture of the Random Light plays with shadow while it emits a soft glow.

Colours




Black



White

Random Light II / large

Dimensions

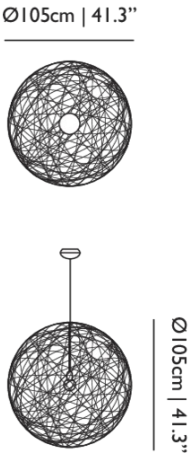

Product

WIDTH 105cm | 41.3"
HEIGHT 105cm | 41.3"
DEPTH 105cm | 41.3"
DIAMETER 105cm | 41.3"
WEIGHT NETTO 2.5kg | 5.51lbs

Packaging

WIDTH 110cm | 43.3"
HEIGHT 110cm | 43.3"
CUBAGE 1.33m^3 | 47ft^3
LENGTH 110cm | 43.3"
WEIGHT 13.5kg | 29.76lbs

Technical CCC

MATERIAL
Sphere from fibreglass with epoxy resin, chromed steel pendant

ENERGY LABEL
A++ to E

LIGHTSOURCE INCLUDED
Yes

DIAMETER SHADE
105cm | 41.3"

FREQUENCY
50/60

LAMPHOLDER
E27

LIFETIME
30000 hours

CABLE LENGTH
400cm | 157.5"

COLOUR TEMPERATURE
2700 K (max)

LIGHT DIRECTION
All directions

LIGHTSOURCE TYPE
LED

NUMBER OF LIGHTSOURCES
1

INPUT VOLTAGE
220-240V

MAX POWER CONSUMPTION
60W

RECOMMENDED LIGHTSOURCE
60W MAX type G, 8W LED light included

CABLE COLOUR
Black

CANOPY
Pebble II Black, ABS, Pebble II White, ABS

CRI
90

LIGHT OUTPUT
800 lm

DIMMING & LIGHTING CONTROL
Mains dimmable with compatible light source

See last page for more information about the dimming possibilities.

Technical UL

MATERIAL

Sphere from fibreglass with epoxy resin, chromed steel pendant

ENERGY LABEL

A++ to E

LIGHTSOURCE INCLUDED

Yes

DIAMETER SHADE

105cm | 41.3"

FREQUENCY

50/60

LAMPHOLDER

E26

LIFETIME

30000 hours

CABLE LENGTH

400cm | 157.5"

COLOUR TEMPERATURE

2700 K (max)

LIGHT DIRECTION

All directions

LIGHTSOURCE TYPE

Incandescent

NUMBER OF LIGHTSOURCES

1

INPUT VOLTAGE

110-130V

MAX POWER CONSUMPTION

60W

RECOMMENDED LIGHTSOURCE

60W MAX type G, 8W LED light included

CABLE COLOUR

Black

CANOPY

Pebble II Black, ABS, Pebble II White, ABS

CRI

90

LIGHT OUTPUT

800 lm


DIMMING & LIGHTING CONTROL

Mains dimmable with compatible light source

See last page for more information about the dimming possibilities.

Random Light II / medium

Dimensions

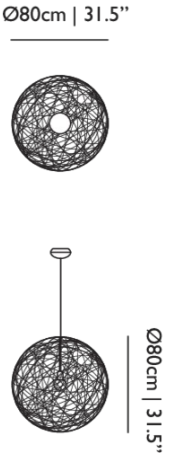

Product

WIDTH 80cm | 31.5"
HEIGHT 80cm | 31.5"
DEPTH 80cm | 31.5"
DIAMETER 80cm | 31.5"
WEIGHT NETTO 1.2kg | 2.65lbs

Packaging

WIDTH 87cm | 34.3"
HEIGHT 87cm | 34.3"
CUBAGE 0.66m^3 | 23.25ft^3
LENGTH 87cm | 34.3"
WEIGHT 5.5kg | 12.13lbs

Technical CCC

MATERIAL
Sphere from fibreglass with epoxy resin, chromed steel pendant

ENERGY LABEL
A++ to E

LIGHTSOURCE INCLUDED
Yes

DIAMETER SHADE
80cm | 31.5"

FREQUENCY
50/60

LAMPHOLDER
E27

LIFETIME
30000 hours

CABLE LENGTH
400cm | 157.5"

COLOUR TEMPERATURE
2700 K (max)

LIGHT DIRECTION
All directions

DIMMING & LIGHTING CONTROL
Mains dimmable with compatible light source

LIGHTSOURCE TYPE
Incandescent

NUMBER OF LIGHTSOURCES
1

INPUT VOLTAGE
220-240V

MAX POWER CONSUMPTION
60W

RECOMMENDED LIGHTSOURCE
60W MAX type G, 8W LED light included

CABLE COLOUR
Black

CANOPY
Pebble II Black, ABS, Pebble II White, ABS

CRI
90

LIGHT OUTPUT
800 lm

See last page for more information about the dimming possibilities.

Technical UL

MATERIAL

Sphere from fibreglass with epoxy resin, chromed steel pendant

ENERGY LABEL

A++ to E

LIGHTSOURCE INCLUDED

Yes

DIAMETER SHADE

80cm | 31.5"

FREQUENCY

50/60

LAMPHOLDER

E26

LIFETIME

30000 hours

CABLE LENGTH

400cm | 157.5"

COLOUR TEMPERATURE

2700 K (max)

LIGHT DIRECTION

All directions

LIGHTSOURCE TYPE

Incandescent

NUMBER OF LIGHTSOURCES

1

INPUT VOLTAGE

110-130V

MAX POWER CONSUMPTION

60W

RECOMMENDED LIGHTSOURCE

60W MAX type G, 8W LED light included

CABLE COLOUR

Black

CANOPY

Pebble II Black, ABS, Pebble II White, ABS

CRI

90

LIGHT OUTPUT

800 lm


DIMMING & LIGHTING CONTROL

Mains dimmable with compatible light source

See last page for more information about the dimming possibilities.

Random Light II / small

Dimensions

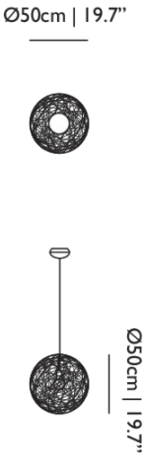

Product

WIDTH 50cm | 19.7"
HEIGHT 50cm | 19.7"
DEPTH 50cm | 19.7"
DIAMETER 50cm | 19.7"
WEIGHT NETTO 0.6kg | 1.32lbs

Packaging

WIDTH 51cm | 20.1"
HEIGHT 53cm | 20.9"
CUBAGE 0.14m^3 | 4.87ft^3
LENGTH 51cm | 20.1"
WEIGHT 2.5kg | 5.51lbs

Technical CCC

MATERIAL
Sphere from fibreglass with epoxy resin, chromed steel pendant

ENERGY LABEL
A++ to E

LIGHTSOURCE INCLUDED
Yes

DIAMETER SHADE
50cm | 19.7"

FREQUENCY
50/60

LAMPHOLDER
E27

LIFETIME
30000 hours

CABLE LENGTH
400cm | 157.5"

COLOUR TEMPERATURE
2700 K (max)

LIGHT DIRECTION
All directions

LIGHTSOURCE TYPE
Incandescent

NUMBER OF LIGHTSOURCES
1

INPUT VOLTAGE
220-240V

MAX POWER CONSUMPTION
60W

RECOMMENDED LIGHTSOURCE
60W MAX type G, 8W LED light included

CABLE COLOUR
Black

CANOPY
Pebble II Black, ABS, Pebble II White, ABS

CRI
90

LIGHT OUTPUT
800 lm

DIMMING & LIGHTING CONTROL
Mains dimmable with compatible light source

See last page for more information about the dimming possibilities.

Technical UL

MATERIAL

Sphere from fibreglass with epoxy resin, chromed steel pendant

ENERGY LABEL

A++ to E

LIGHTSOURCE INCLUDED

Yes

DIAMETER SHADE

50cm | 19.7"

FREQUENCY

50/60

LAMPHOLDER

E26

LIFETIME

30000 hours

CABLE LENGTH

400cm | 157.5"

COLOUR TEMPERATURE

2700 K (max)

LIGHT DIRECTION

All directions

LIGHTSOURCE TYPE

Incandescent

NUMBER OF LIGHTSOURCES

1

INPUT VOLTAGE

110-130V

MAX POWER CONSUMPTION

60W

RECOMMENDED LIGHTSOURCE

60W MAX type G, 8W LED light included

CABLE COLOUR

Black

CANOPY

Pebble II Black, ABS, Pebble II White, ABS

CRI

90

LIGHT OUTPUT

800 lm

DIMMING & LIGHTING CONTROL

Mains dimmable with compatible light source

See last page for more information about the dimming possibilities.

Dimming & Lighting Control

Mains dimmable with compatible light source

Compatible models: large CE, large UL, medium CE, medium UL, small CE, small UL
