

m o o o i[®]



Heracleum Endless

by Bertjan Pot

Powered through *Electrosandwich* by Marcel Wanders

A perpetual blossom of new branches that multiplies by the meter, Heracleum Endless by Bertjan Pot may really grow out of reach! There is hardly a limit to what Heracleum can now achieve by developing in straight lines, generating corners and forming square geometric shapes. Given the seed of a good idea, it may grow into any kind of environment, meter by meter. Let there be no end to the bloom of Heracleum Endless!

Designer

Bertjan Pot

Year of design

2014

colours



Nickel



Copper

technical general

Amount of LED's:

45

Colour temperature (degrees Kelvin, K) Colour rendering index:

2700K (warm white, comparable to incandescent) CRI_Ra > 80

Luminous flux (Lumen, lm):

400 lm per meter

Power consumption MAX 12W

Mains Dimmable

Cable Length

4M (10M on request)

Cable Colour

Transparent with tinned cores

Canopy

One pebble per meter, in matching finish: copper & nickel

Suspension wires

2 suspension wires for four meters

Available connectors

- 135 degree bend
- 90 degree bend

Cable length 4M | 13.1ft (transparent) can be shortened down to 30cm | 11.8".

Heracleum Endless Technical (ce)



Input voltage of 220-240V ~50Hz AC

Voltage on lamp < 5V DC (actual lamp surface functions as conductor!)



Plastic canopy in matching colour,
cable length 4M (transparent)

Power supply included in canopy.

Professional installation
recommended.

Recommended Dimmers CE 220V-240V

Manufacturer - Dimmer

BERKER - 286710

BERKER - 2902

BUSCH J - 6513U-102

DIGITALSTROM - GE-KM200

DIGITALSTROM - GE-TKM210

DIGITALSTROM - GE-SDM200

DIGITALSTROM - GE-SDS200

ELARI - ATD 315

ELARI - ATD 600R

ELKO - 3670

ELKO - 420 GLE/I

ELTAKO - EUD61NPN-UC

ELTAKO - EUD12D-UC

ELTAKO - EUD12NPN-UC

EPV - PAB 315

GIRA - 118200

GIRA - 30500

GIRA - 117600/103

INSTA - 51190

INSTA - 53128

INSTA - FUNK 576650 22

INSTA - 51040

JUNG - 1254 UDE

JUNG - 243 EX

LEGRAND - 670 85

LUTRON - LPRPM-4A

LUTRON - GRAFIK INTEGRAL GXI

MERTEN - 5771

MOELLER/EATON - CDAU-01/03

MOELLER - CDAE-01/02

MOELLER xcomfort - CDAU-01/03

OPUS - 852395

SCHNEIDER - WED002311

SCHNEIDER - SBD315RC

SCHNEIDER - ATD 315

SCHNEIDER - 600R

SIEMENS - 5 TC8 284

TRONIC - INSTA 51161

VADSBO - LS220

VADSBO - LD220

Heracleum Endless Technical (110V)



Dimmable with mains voltage dimmer (dimmer for incandescent, halogen)
Please make sure to use a dimmer rated for a low power luminaire.

Input voltage of 110-127V~60Hz AC

Voltage on lamp < 5V DC (actual lamp surface functions as conductor!)



Steel canopy, cable length 4M | 13.1
ft (transparent)

Power supply included in canopy.

Professional installation
recommended.

recommended dimmers 110v-120V

Dimmers below (make & type) have proven to show a fluent dimming behaviour with cULus version:

Lutron CT-603PGH-WH

Lutron DIVA DV-603PG

Lutron DV-600P


Lutron CTCL-153 PD

Lutron LQSA-4A-D & QSNE-4A-D

IMPORTANT! The use of a non-recommended dimmer can lead to unexpected dimming behavior and even non-repairable damage of the fixture and/or driver.

m o o o i[®]

dimensions

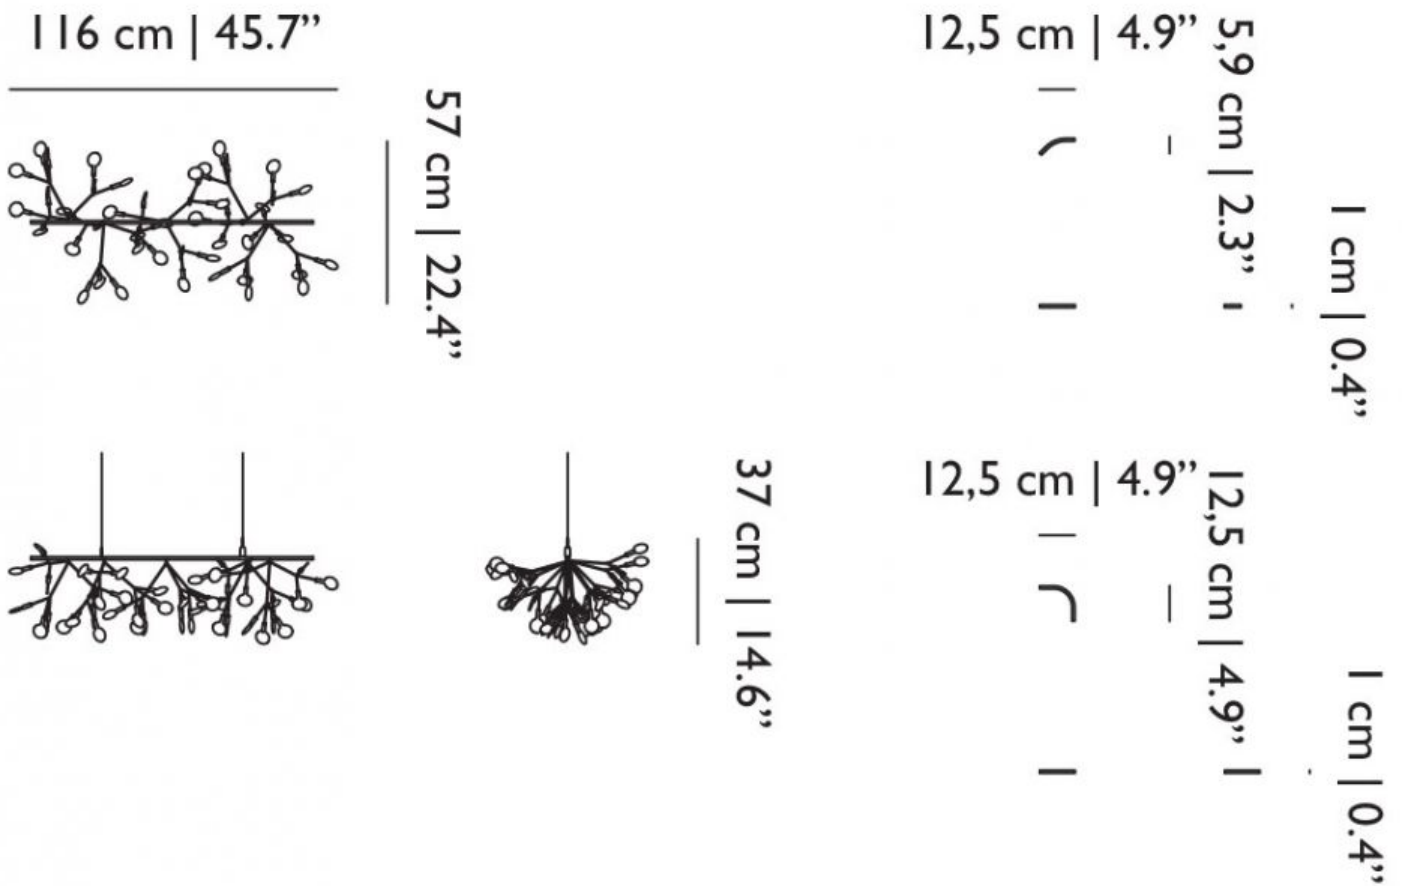

packaging

H 44 cm | 17,3"
W 66 cm | 26"
D 125 cm | 49,2"

Colli 1/1
Product weight:
4,5 KG | 9,9 lb
With packaging:
6,5 KG | 14,3 lb



Recommended dimmers (ce)

Dimmers below (make & type) have proven to show a fluent dimming behaviour with *CE version*:

GIRA 226200 (replaces 030600) R,L

JUNG 244HEX20-500 R,L

INSTA 51180 R,L

PEHA 435 HAN R,L

Cooper control iLight system source controllers: SCI0410, SCI0805, SCI1210, SCI1220

Lutron LQSA-4A-D & QSNE-4A-D

IMPORTANT! The use of a non-recommended dimmer can lead to unexpected dimming behavior and even non-repairable damage of the fixture and/or driver.