

m o o o i

# Drape Light


JAMIE WOLFOND, 2024



The Drape Light by Jamie Wolfond uses its geometric structure with a 3D-knitted polyester shade to create an essential, deliberate, and warm atmosphere. Shaped by gravity, the shade drapes over two minimalistic glass LED tube lights. This versatile and thoughtful light comes in two sizes and is perfect for every space.

---

## *Detailing*

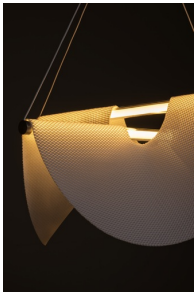

Shaped by gravity, the 3D-knitted polyester fabric rests on a minimal frame of two glass tubes encapsulating LED lights.

---

## *Colours*


Drape Light

---



# Drape Light / 118

## Dimensions

118cm | 46,5"



78cm | 30,7"



91cm | 35,8"

## Product

**WIDTH** 118cm | 46.5"

**HEIGHT** 91cm | 35.8"

**DEPTH** 78cm | 30.7"

**WEIGHT NETTO** 3.6kg | 7.94lbs

## Packaging

**WIDTH** 25cm | 9.8"

**HEIGHT** 21cm | 8.3"

**CUBAGE** 0.07m<sup>3</sup> | 2.43ft<sup>3</sup>

**LENGTH** 131cm | 51.6"

**WEIGHT** 12kg | 26.46lbs

## Technical UL / CE

### MATERIAL

360° LED lighting in glass tubes with aluminum details, draped 3D-knitted PL fabric

### INSTALLATION REQUIRED

Yes

### LIGHTSOURCE TYPE

LED

### LIGHTSOURCE INCLUDED

Yes

### NUMBER OF LIGHTSOURCES

3

### SHAPE

Abstract

### INPUT VOLTAGE

120-250V

### FREQUENCY

50/60

### MAX POWER CONSUMPTION

50W

### LIFETIME

50000 hours

### CABLE COLOUR

RAL 9016 (Traffic white)

### CABLE LENGTH

250cm | 98.4"

### SWITCH

No

### CANOPY

Pebble III in matching color

### CHROM X

0.4588

### CHROM Y

0.414

### COLOUR TEMPERATURE

2740 K (max)

### CRI

81

### LIGHT DIRECTION

All directions

### LIGHT OUTPUT

3850 lm

### R9

0

#### DIMMING & LIGHTING CONTROL

DALI dt6, Wireless Wall Switch (dimmer), Push / Pulse dim on Line Voltage, Mains / ELV dimming is not possible

See last page for more information about the dimming possibilities.



#### Energy Label information

##### LIGHTING TECHNOLOGY USED

LED

##### DIMMABLE

Yes

##### ENERGY CONSUMPTION IN ON-MODE (KWH/1000 H)

50 kWh

##### ENERGY EFFICIENCY CLASS

F

##### USEFUL LUMINOUS FLUX (ΦUSE)

3850 lm

##### CORRELATED COLOUR TEMPERATURE

2740 K (max)

##### ON-MODE POWER (PON)

50W

##### LIFETIME

50000 hours

##### COLOUR RENDERING INDEX, ROUNDED TO THE NEAREST INTEGER, OR THE RANGE OF CRI-VALUES THAT CAN BE SET

81


##### R9 COLOUR RENDERING INDEX VALUE

0

## Drape Light / 78

#### Dimensions

78cm | 30,7"

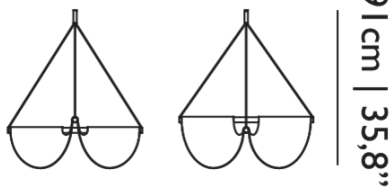

#### Product

**WIDTH** 78cm | 30.7"

**HEIGHT** 91cm | 35.8"

**DEPTH** 78cm | 30.7"

**WEIGHT NETTO** 2.8kg | 6.17lbs

#### Packaging

**WIDTH** 25cm | 9.8"

**HEIGHT** 21cm | 8.3"

**CUBAGE** 0.06m<sup>3</sup> | 2.06ft<sup>3</sup>

**LENGTH** 111cm | 43.7"

**WEIGHT** 10kg | 22.05lbs

#### Technical UL / CE

##### MATERIAL

360° LED lighting in glass tubes with aluminum details, draped 3D-knitted PL fabric

##### INSTALLATION REQUIRED

Yes

##### LIGHTSOURCE TYPE

LED

**LIGHTSOURCE INCLUDED**

Yes

**NUMBER OF LIGHTSOURCES**

2

**SHAPE**

Abstract

**INPUT VOLTAGE**

120-250V

**FREQUENCY**

50/60

**MAX POWER CONSUMPTION**

30W

**LIFETIME**

50000 hours

**CABLE COLOUR**

RAL 9016 (Traffic white)

**CABLE LENGTH**

250cm | 98.4"

**SWITCH**

No

**CANOPY**

Pebble III in matching color

**CHROM X**

0.4585

**CHROM Y**

0.413

**COLOUR TEMPERATURE**

2740 K (max)

**CRI**

81

**LIGHT DIRECTION**

All directions

**LIGHT OUTPUT**

2150 lm

**R9**

1

**DIMMING & LIGHTING CONTROL**

DALI dt6, Wireless Wall Switch (dimmer), Push / Pulse dim on Line Voltage, Mains / ELV dimming is not possible

*See last page for more information about the dimming possibilities.*

*Energy Label information***LIGHTING TECHNOLOGY USED**

LED

**DIMMABLE**

Yes

**ENERGY CONSUMPTION IN ON-MODE (KWH/1000 H)**

30 kWh

**ENERGY EFFICIENCY CLASS**

F

**USEFUL LUMINOUS FLUX (ΦUSE)**

2150 lm

**CORRELATED COLOUR TEMPERATURE**

2740 K (max)

**ON-MODE POWER (PON)**

30W

**LIFETIME**

50000 hours

**COLOUR RENDERING INDEX, ROUNDED TO THE NEAREST INTEGER, OR THE RANGE OF CRI-VALUES THAT CAN BE SET**

81

**R9 COLOUR RENDERING INDEX VALUE**

1

## *Dimming & Lighting Control*

### *DALI dt6*

The luminaire is dimmable by integrating it into a DALI network. This is an universal and professional standard in home automation systems with endless control possibilities and ease. We advise to hire a professional to integrate the luminaire into your DALI network.

Compatible models: 118 CCC, 118 UL, 118 CE, 78 CCC, 78 UL, 78 CE

---

### *Wireless Wall Switch (dimmer)*

With our Wireless Wall Switch, you'll have full control over your Moooi lighting design with one touch. Our Wireless Wall Switch comprises two components, a wall switch and radio device to put in the canopy of your Moooi lighting design. The wall switch can be integrated in System 55 or Decora style wall switches. The Wireless Wall Switch communicates via Bluetooth with the radio device in the luminaires canopy. Within moments you can enjoy full and fluent dimming, all the way to dark.

Compatible models: 118 CCC, 118 UL, 118 CE, 78 CCC, 78 UL, 78 CE

---

### *Push / Pulse dim on Line Voltage*

The luminaire is dimmable by using an external momentary switch or pushbutton switch. The switch is usually mounted on an existing wall socket. In some cases a Phase or Control wire needs to be added to your home's wiring. The switch should be suitable for use with line voltage and of the type 'normal off - momentary on'. The luminaire dims perfectly when the switch makes and holds contact. A short press switches between on and off.

Compatible models: 118 CCC, 118 UL, 118 CE, 78 CCC, 78 UL, 78 CE

---

### *Mains / ELV dimming is not possible*

Mains and/or ELV dimming is not possible. The wireless wall switch is advised for dimming in this case.

Compatible models: 118 CCC, 118 UL, 118 CE, 78 CCC, 78 UL, 78 CE

---